



*Mixed-colored Series*



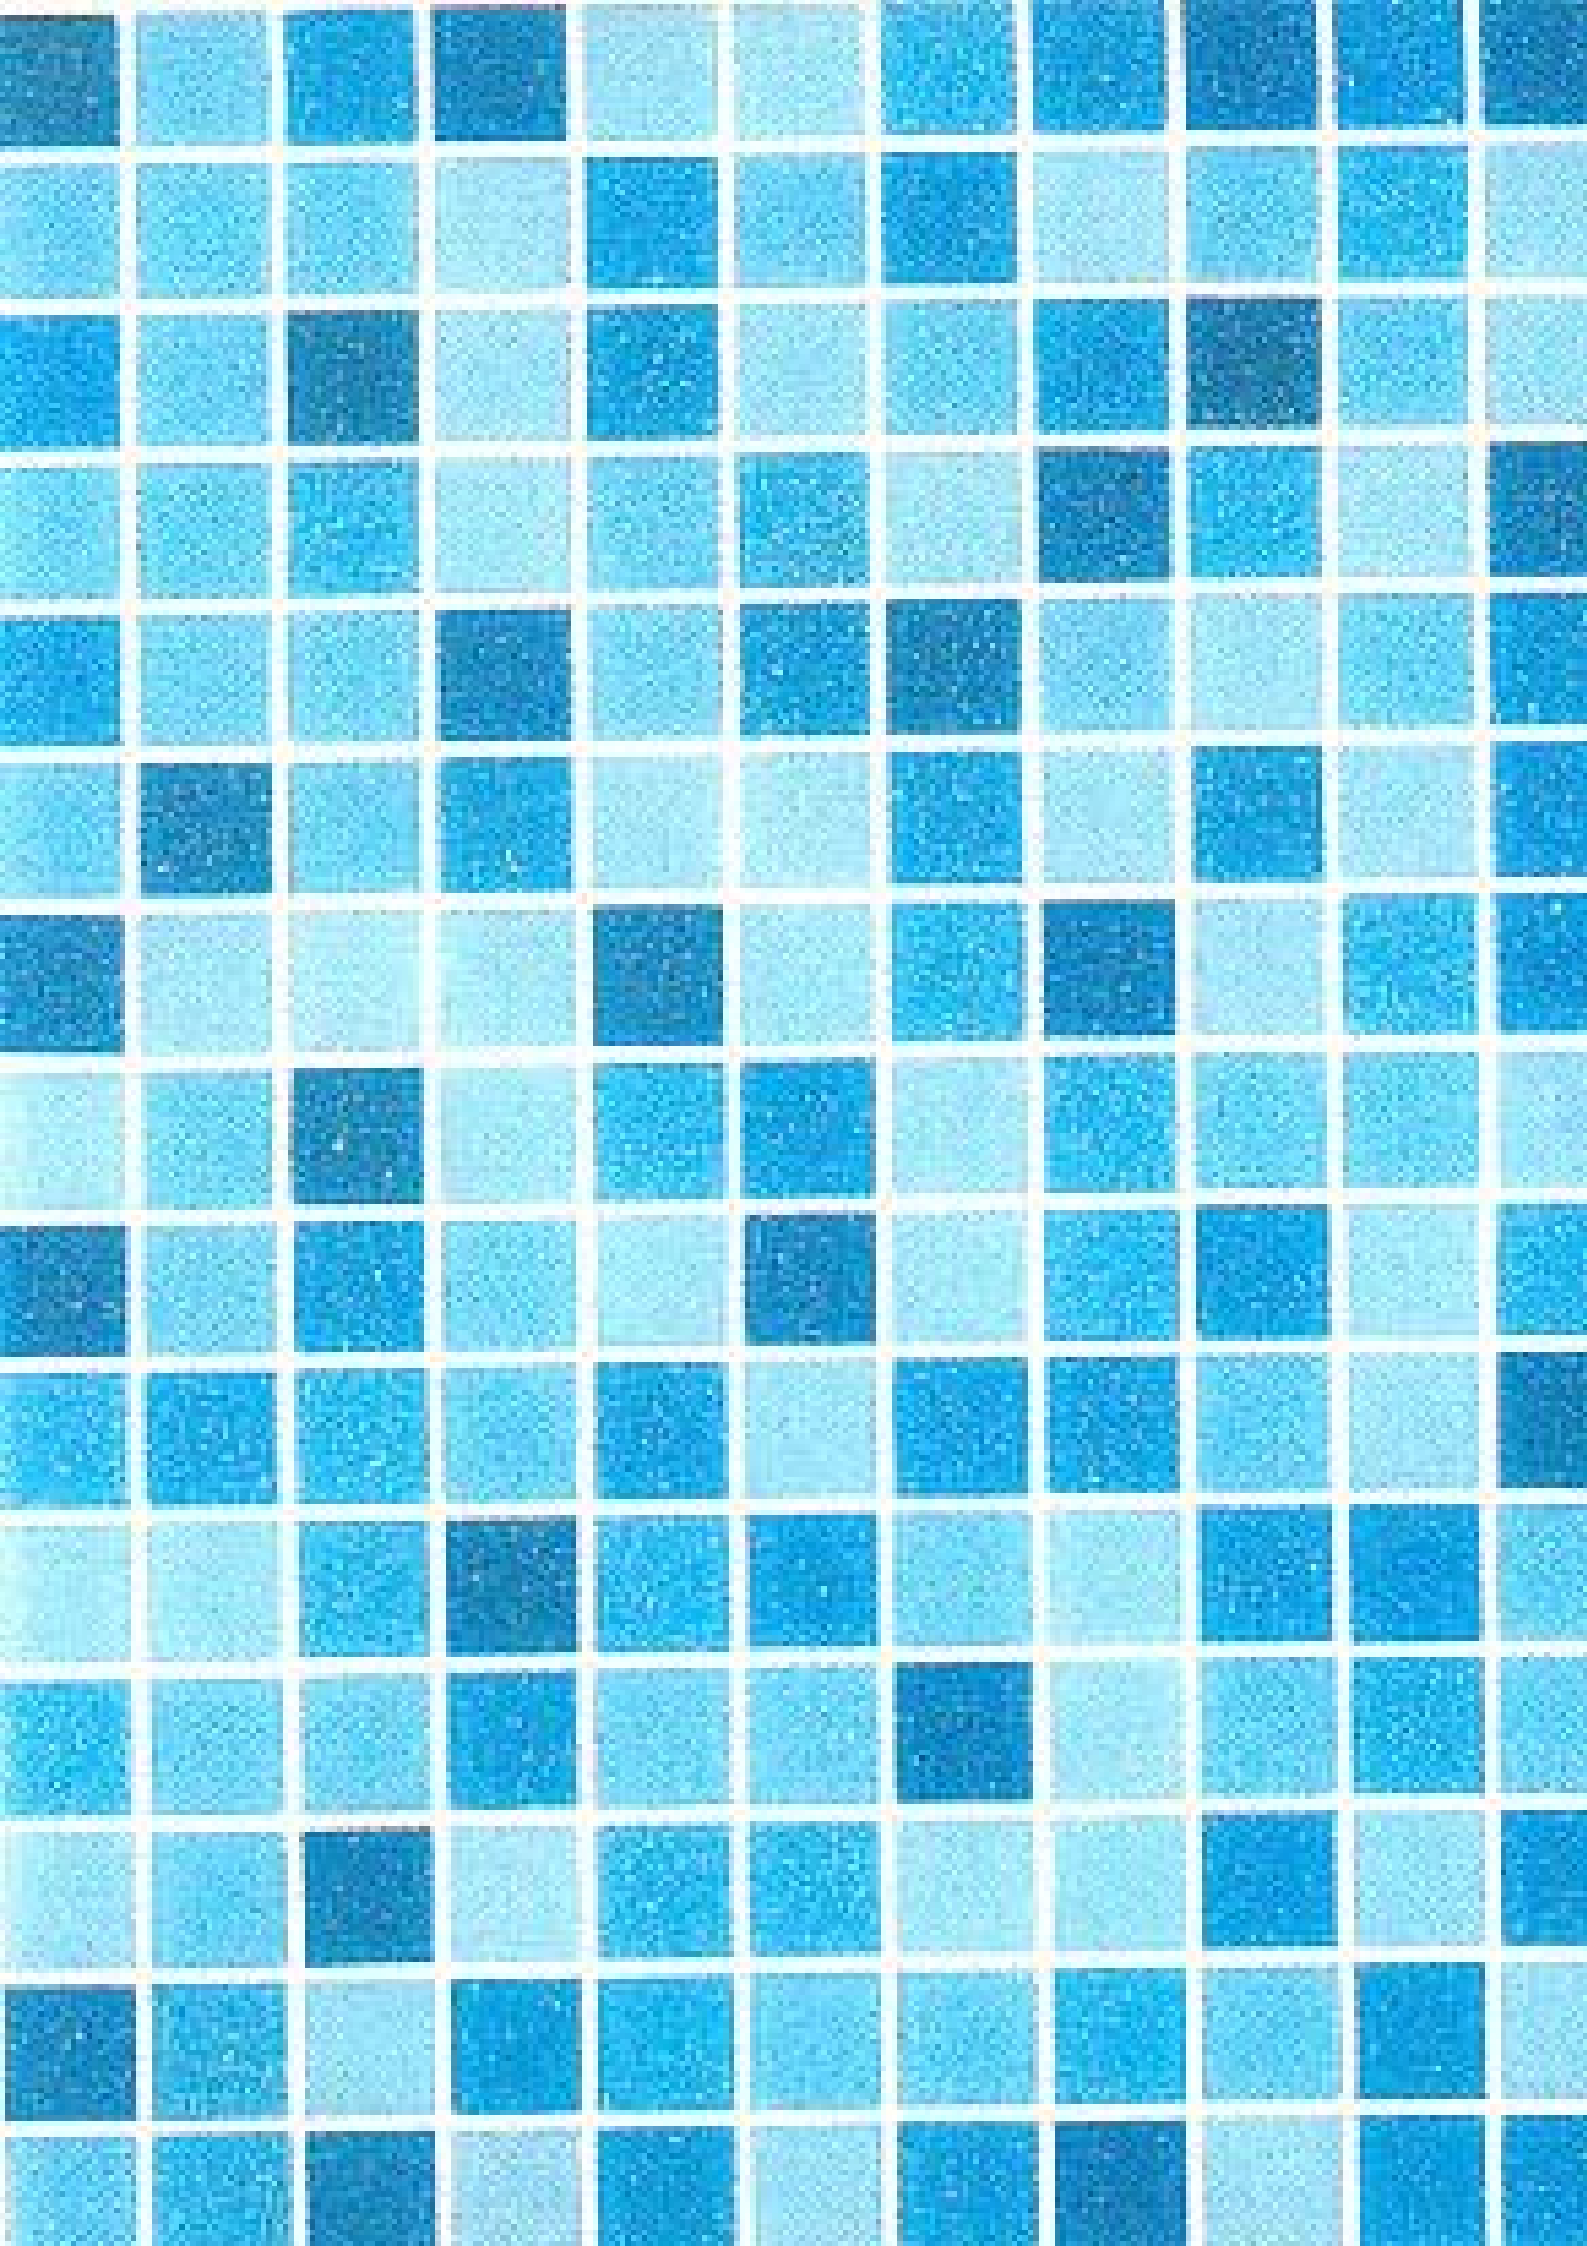

V01




V02




V03




V04




V05




V06

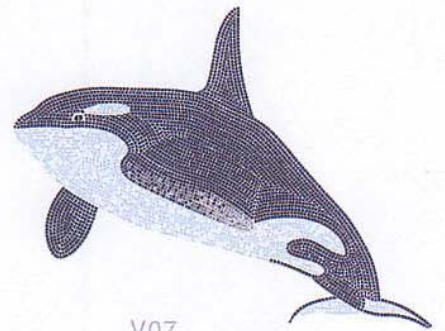

V07

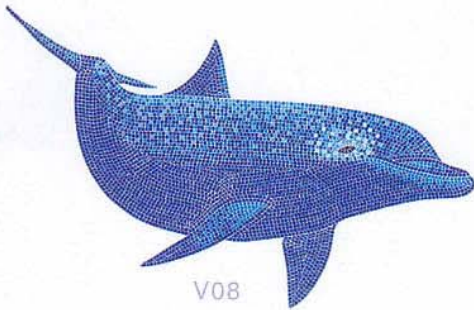

V08

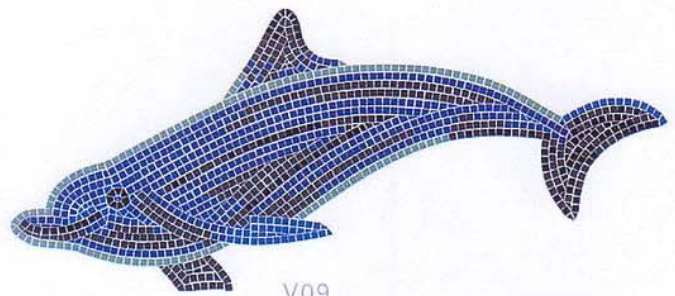

V09







V10



V11



V12



#### Installation instructions:

##### 1. Preparation of the wall surfaces

Make sure the wall surfaces to be smooth, flat, solid, dry and perfectly clean. We suggest creating a white base about 2mm.

##### 2. Preparation for laying

Score lines on the surfaces to help the sheet positioned correctly.

##### 3. Laying

Using the straight of a trowel spread out the adhesive uniformly on the wall. Make sure the adhesive covered all the surface. One time should be not more than 1m

##### A-Mosaic mounted on paper

Install the mosaic sheets with the paper side facing towards you and then using rubber float to ensure perfect adhesion. Wipe the paper with a damp sponge and then remove it gently. Take out of any excess adhesive before it dries by a small spatula.

##### B-Mosaic mounted on mesh

Press the fiberglass mesh backing directly into the adhesive

##### 4.Grouting

Using a grout for particular care. For paper-faced mosaic, ensure that tiles are thoroughly cleaned and spread the grout using a rubber float. Make sure no more than 2m<sup>2</sup> of area at a time. And then leave the grout drying.

##### 5.cleaning

Using a damp sponge to remove any grout.

##### 6.cutting glass mosaic

Using mosaic nippers cut tile by tile.

Using a cutter for cutting the whole sheet.

##### 7. Maintenance

Using normal neutral detergents for daily cleaning;

Using a slightly acidic detergent for special cleaning.

#### The following instructions are for laying PICASSO MOSAICS in swimming pool.

Make sure the pool is dry and a static test has been carried out on the structure. No water is covered for at least 20 days after laying has been completed. Keeping the substrate temperature between 5°C-30°C

Grind down irregularities in the concrete with wire brushes or a flex grinder.

For special or heavy-duty cleaning, we recommend using a slightly acidic detergent.