

DEEP BED SAND FILTERS



EMAUX
Pool and Spa Systems.



ISO9001:2000



CNAB No.018



S: 200430042889.7 L: 200430042885.9




"D" Series Deep Bed Fiberglass Sand Filters

"EMAUX" High Density Fiberglass Sand Filters are constructed by the latest engineering technology. The improvement of flow ability provides an extra pure water filtration. The Fiberglass winding design allows the filter to have extra strength and resistance to chemical and corrosives.

"EMAUX" High Density Fiberglass Sand Filters are the most recommendable equipment for the application of Water and Industrial Water Treatment.

Standard features include:

- * Fiberglass tank, deforming-proof, corrosion-resistant and abrasion-proof.
 - * Exclusive design laterals with Side-slotted to draws water evenly and higher flows, better filtration and longer cycles.
 - * The filters production is by Computerized System controlled with specially designed machines to ensure flexibility reinforcing the Quality on each Stage of manufacture.
 - * Multi-port valve for easy operation.
 - * Uniquely designed Distribution System makes a stable and efficient water flow.
 - * Besides silicon sand, filtration media also can use other materials as well.
- ACTIVE CARBON:** for filtering & absorb odor and organic compounds.
SOFT WATER RESIN: for softening & filtering away the total hardness.
CLEAN WATER DE-IRON: for removing dissolved iron & manganese compounds from raw water supplies for general application.
NITRATE SELECTABLE RESIN: for fleshing the fishpond.
- * Easy installation and maintenance free.
 - * Outlet turbidity: <2NTU
 - * Fitted with Oil Pressure Gauge.
 - * Ten-Year Limited Tank Warranty.

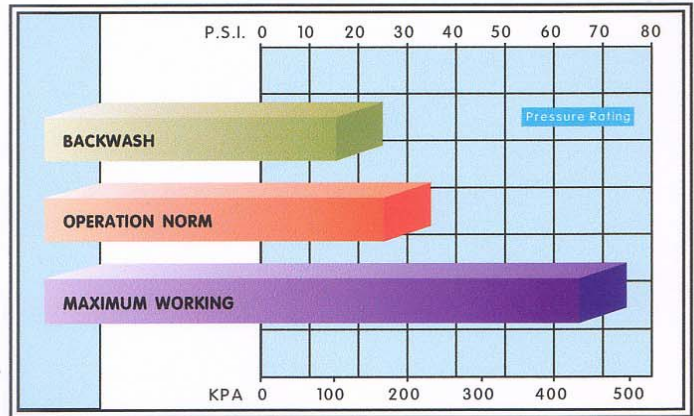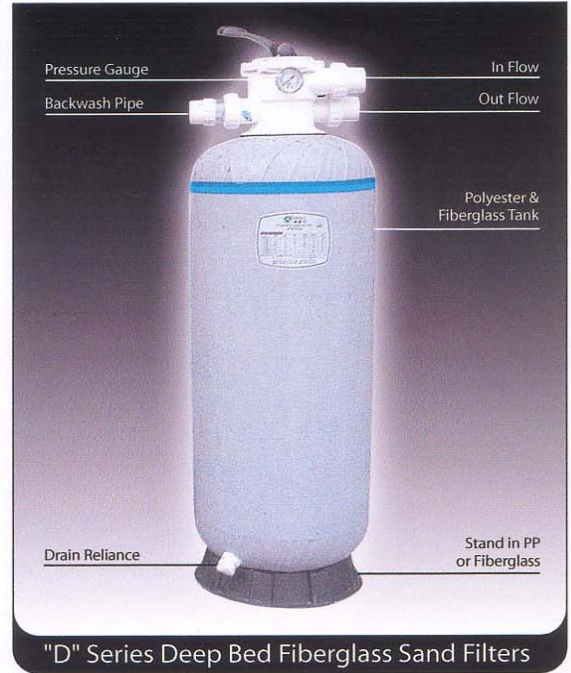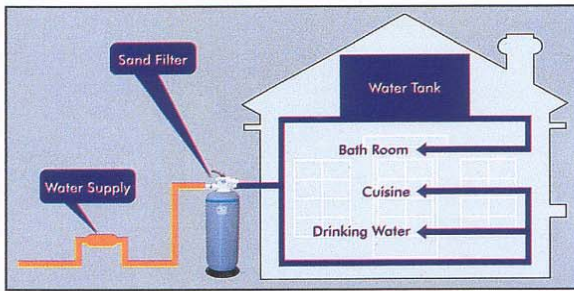

TECHNICAL CHARACTERISTICS

Model No.	D13400	D13500	D13600	D13700	D15400	D15500	D15600	D15700
Tank Dia. (mm)	400	500	600	700	400	500	600	700
Height (mm)	1300	1300	1300	1300	1500	1500	1500	1500
Valve Port Size (mm)	40	40	40	50	40	40	40	50
Filter Area (m ²)	0.13	0.20	0.28	0.38	0.13	0.20	0.28	0.38
Silica Sand (kg)	108	165	228	310	140	216	303	412
Design Flow (m ³ /h)	4.68	7.20	10.08	13.68	4.29	6.60	9.24	12.54



Showroom : 937-9 Corner Sukhumvit 51, Bangkok 10110 Thailand.
 Tel: 0 2259 6248-9 Fax: 0 2258 4773
Head office : 910 Srinakarin Rd., Suanlung, Bangkok 10250 Thailand.
 Tel: 0 2362 5142-58 (17 lines) Fax: 0 2362 5159

www.poolspace.co.th

email : sales@poolspace.co.th

Your Dealer: _____